

FIG. 1

FIG. 2A

FIG. 2A is a perspective view of a hand holding a device 200. The device includes a curved arm 210 with a handle 212 and a base 204. A vertical rod 102 is attached to the arm via a joint 202. The rod has a threaded section 103 and a flange 214. A force G_1 is applied to the rod. A force G_2 is applied to the handle 212. A force G_3 is applied to the base 204. The device is shown in a position where the rod is vertical and the handle is horizontal.

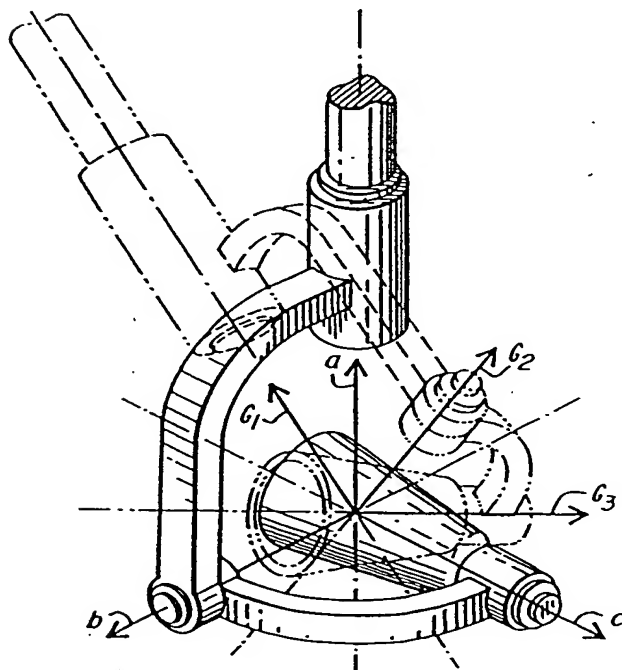


FIG. 2B

3/10

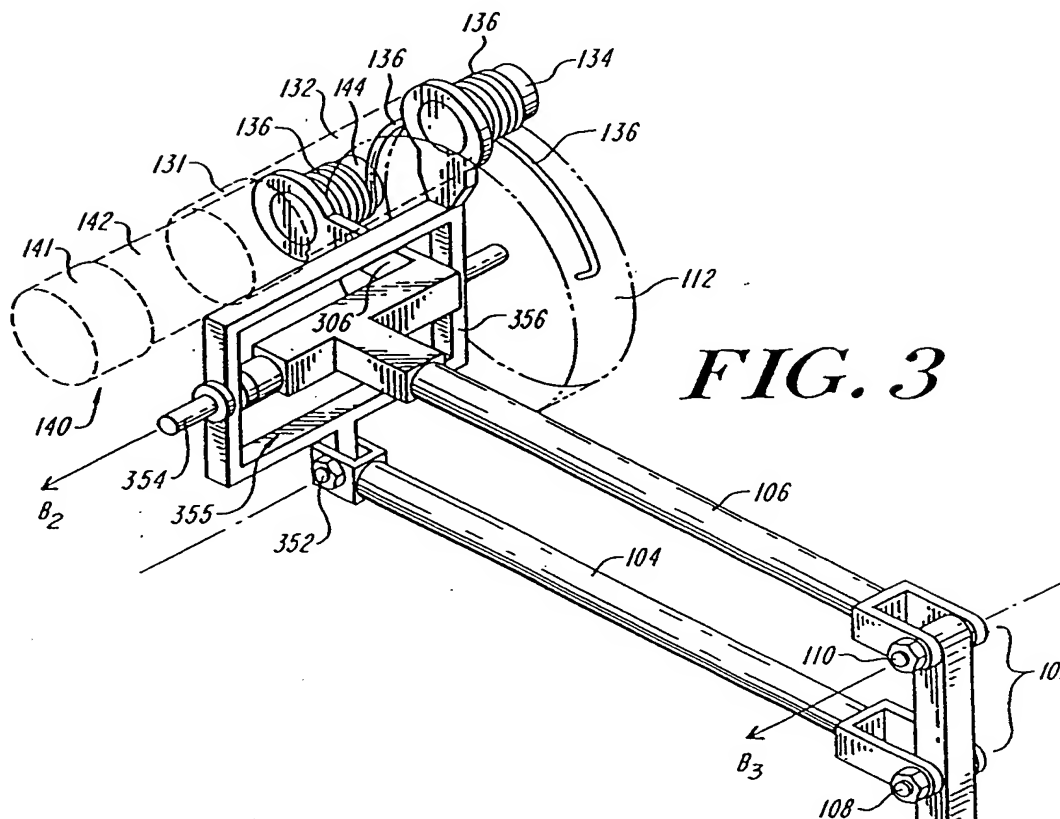


FIG. 3

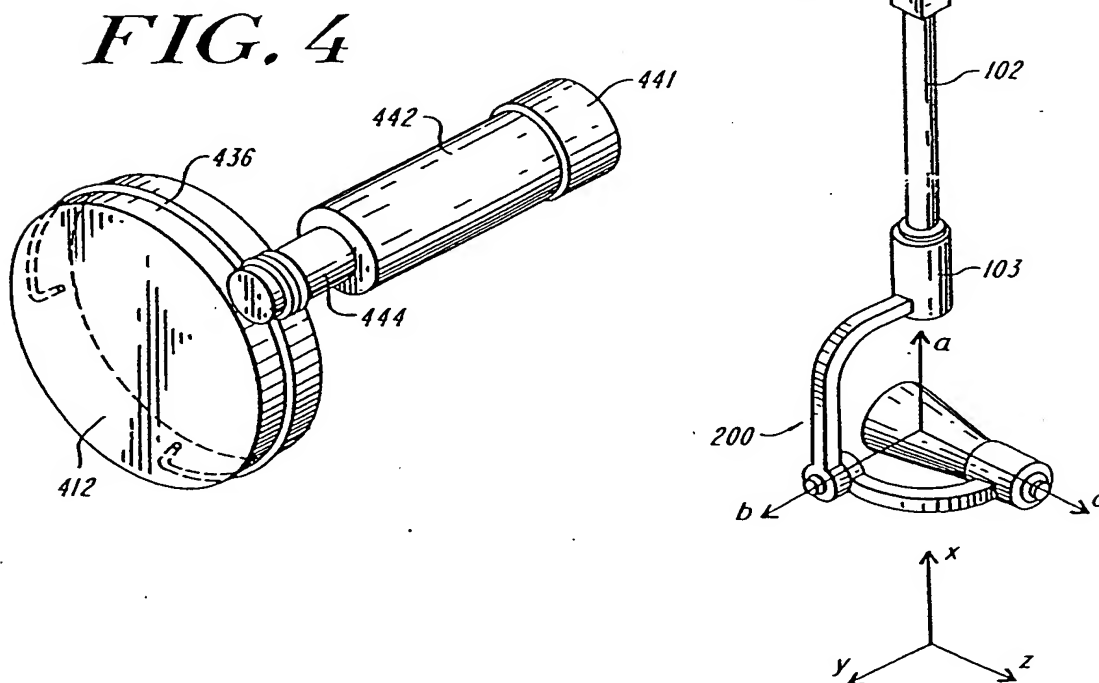


FIG. 4

10022114-11601

4/10




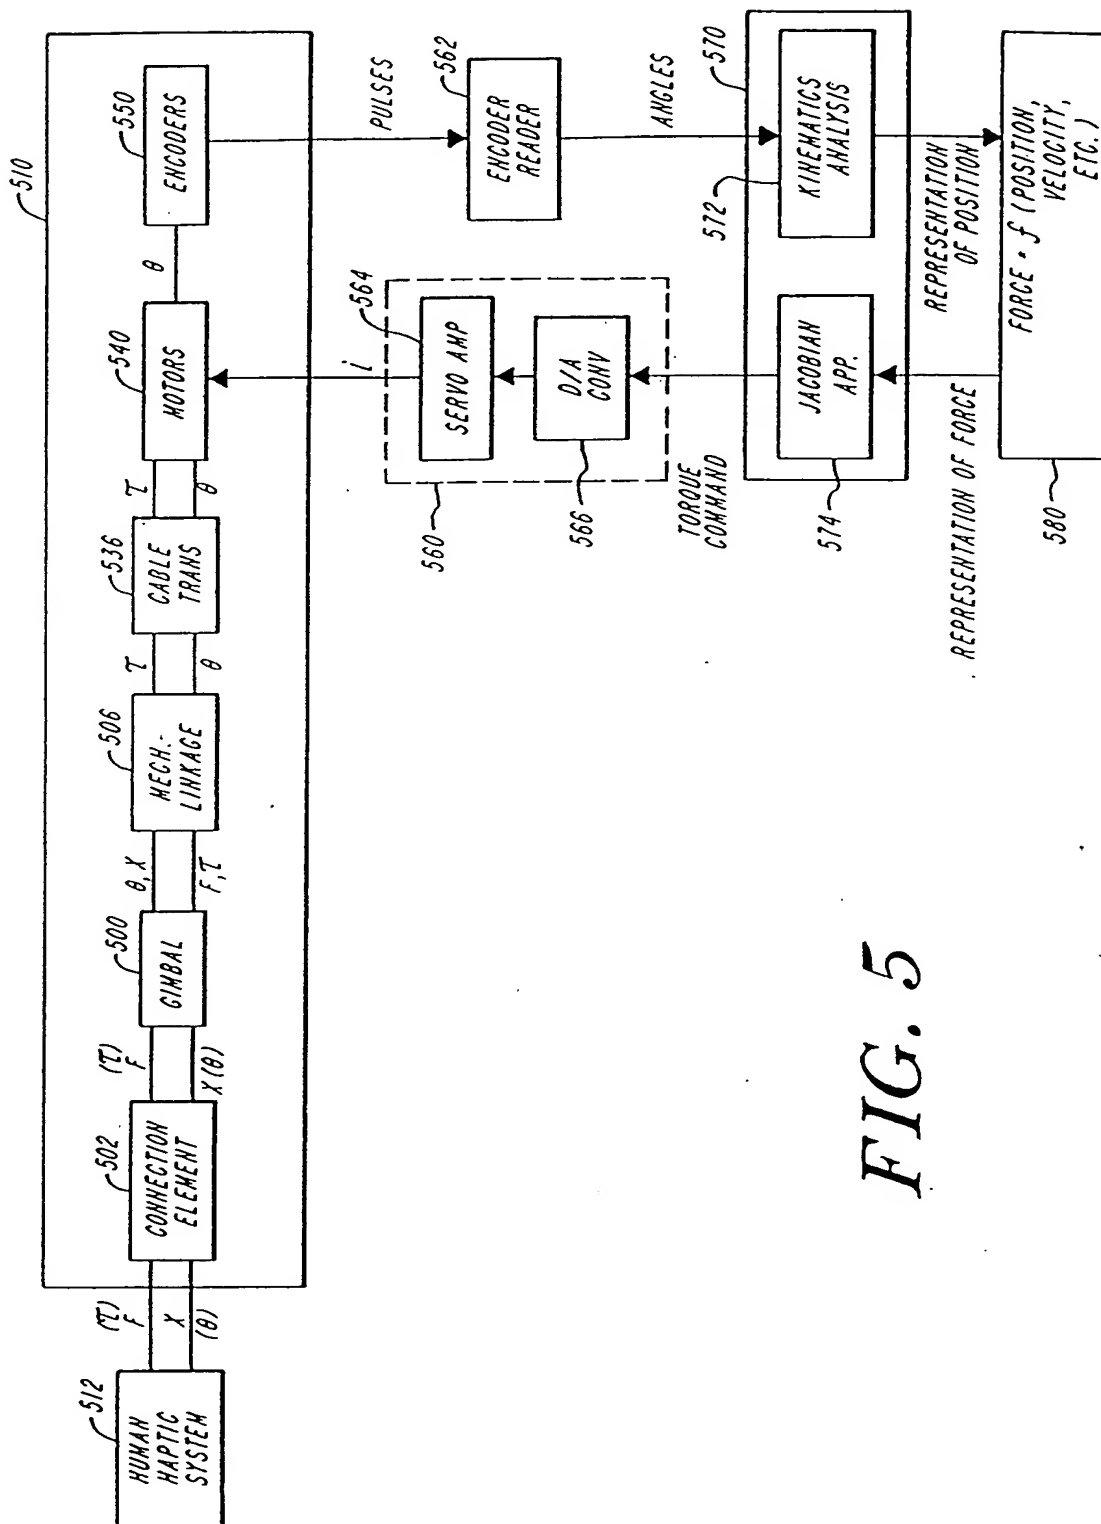


FIG. 5

FOOTPRINT 442200T

5/10

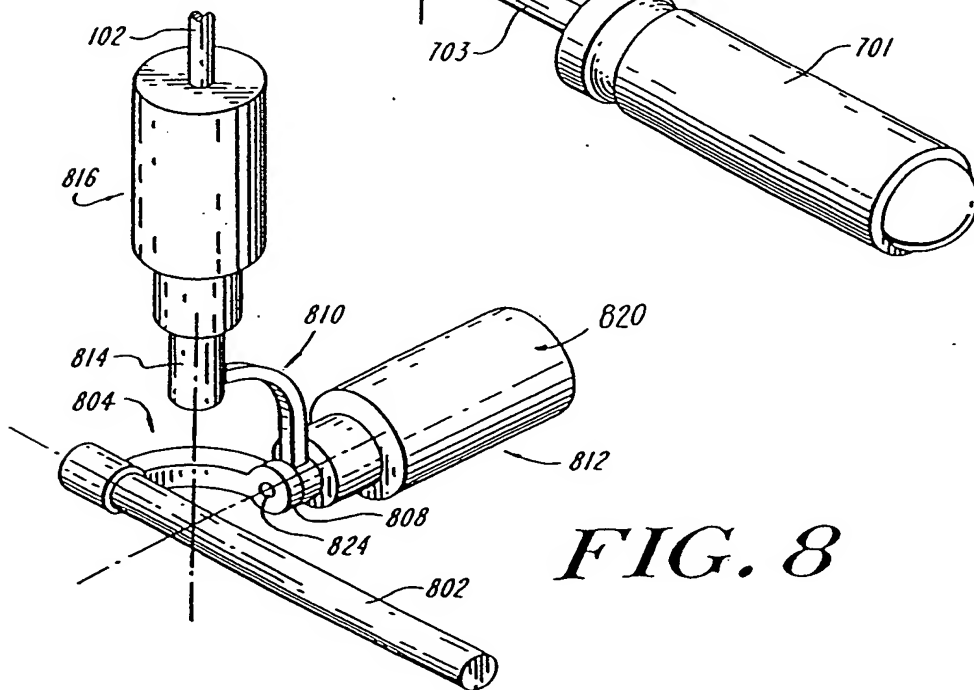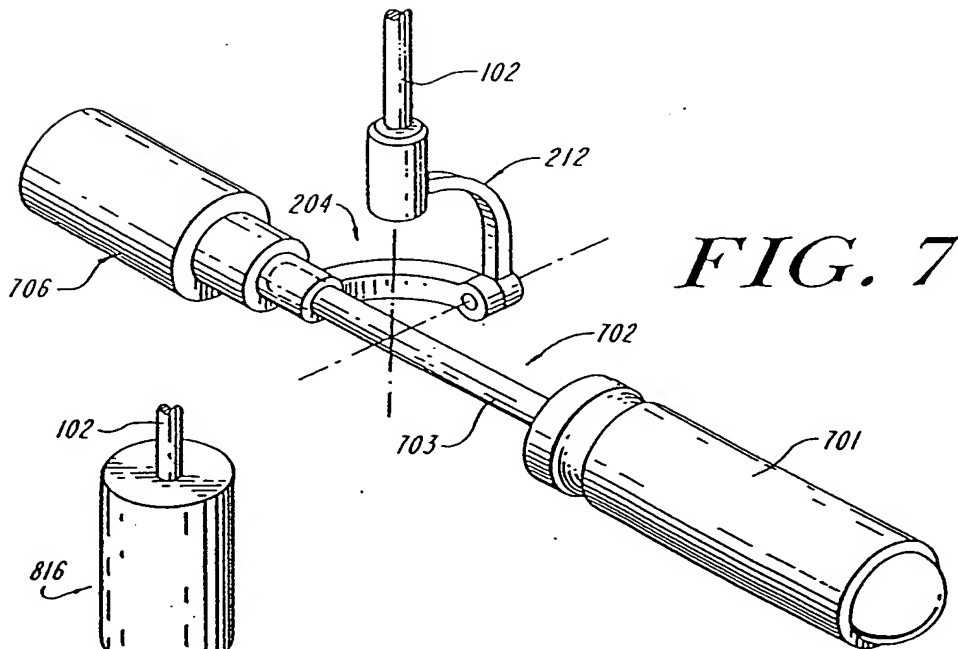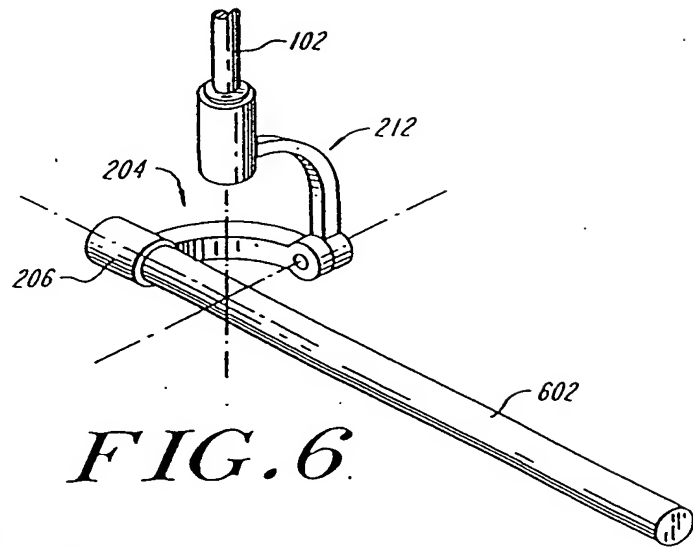

10022114 11601


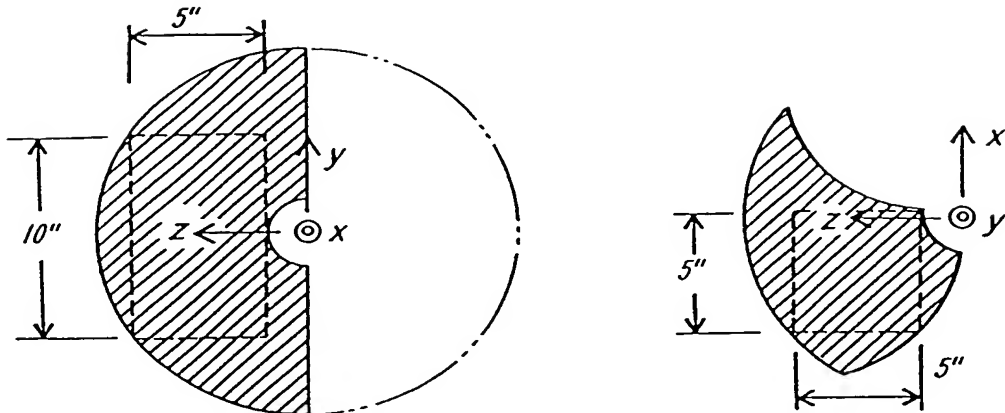


FIG. 9

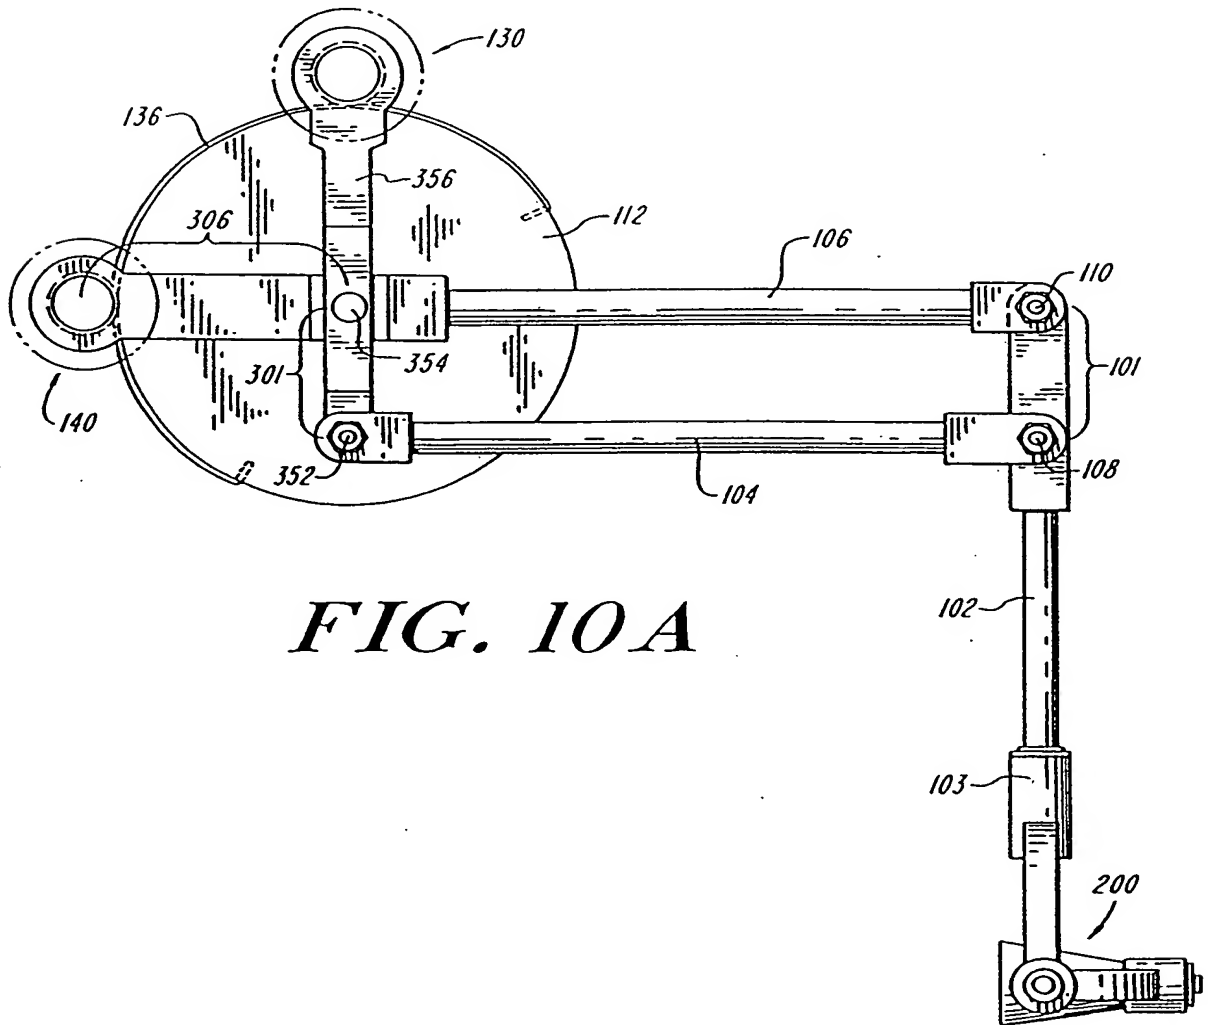

2024-11-01

7/10

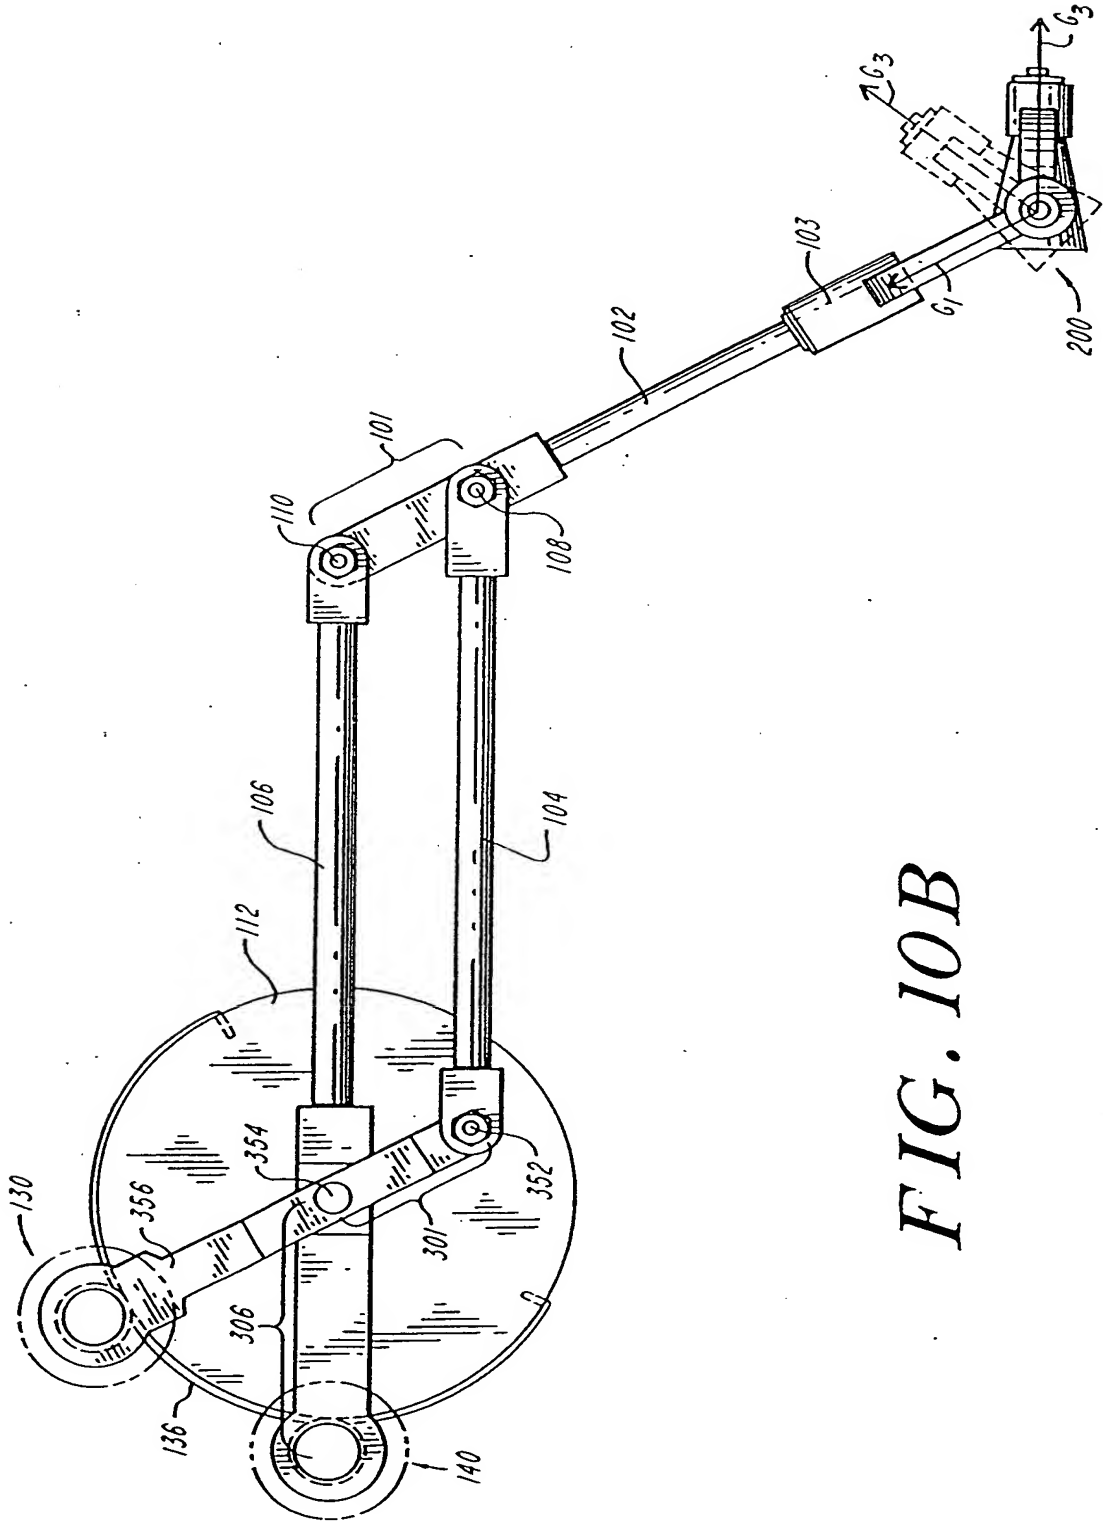
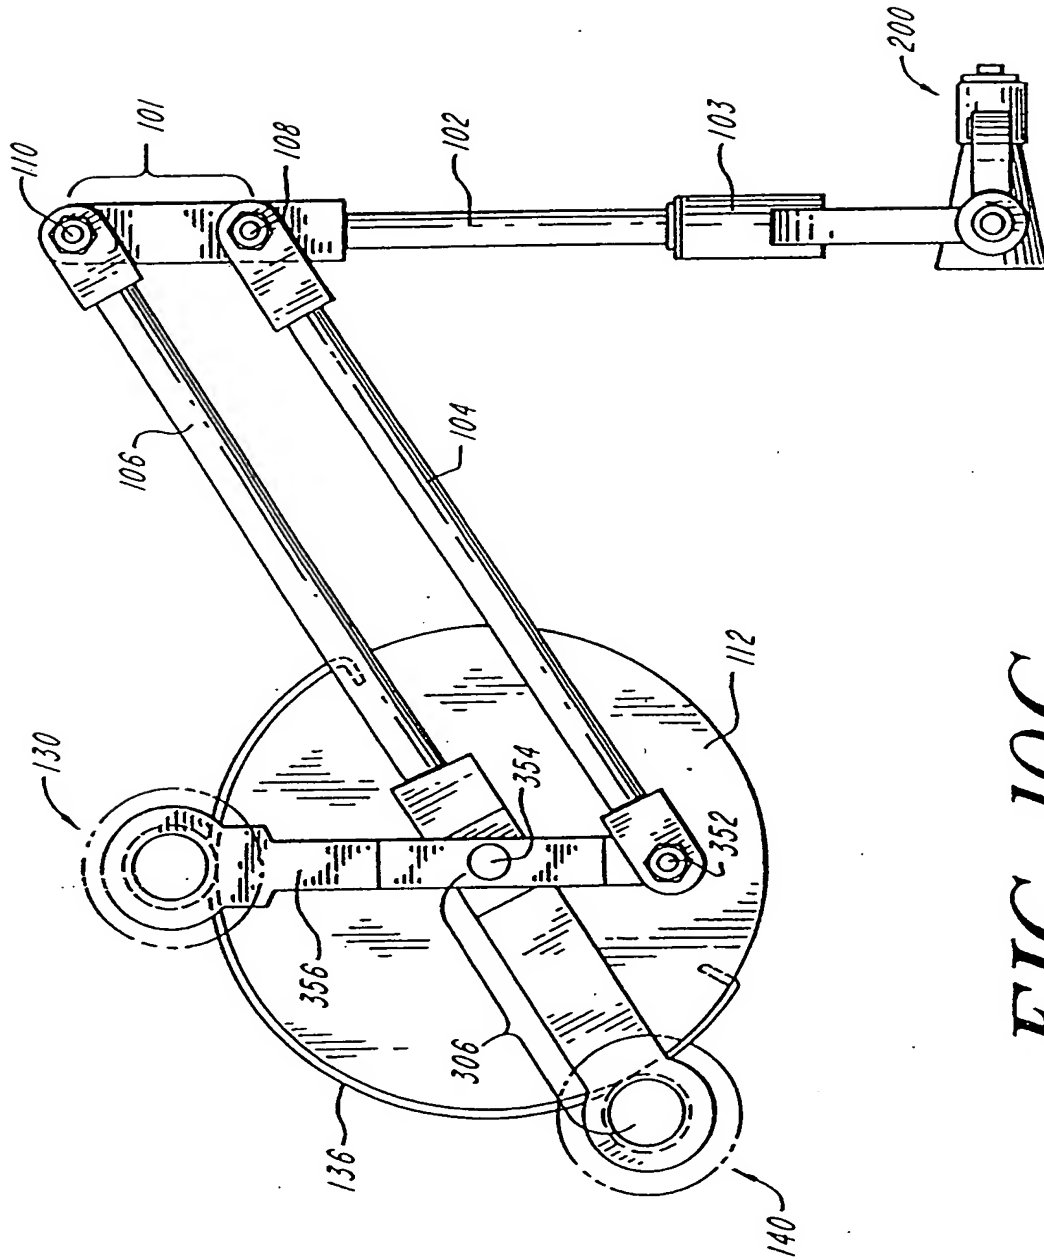


FIG. 10B

FIG. 10B



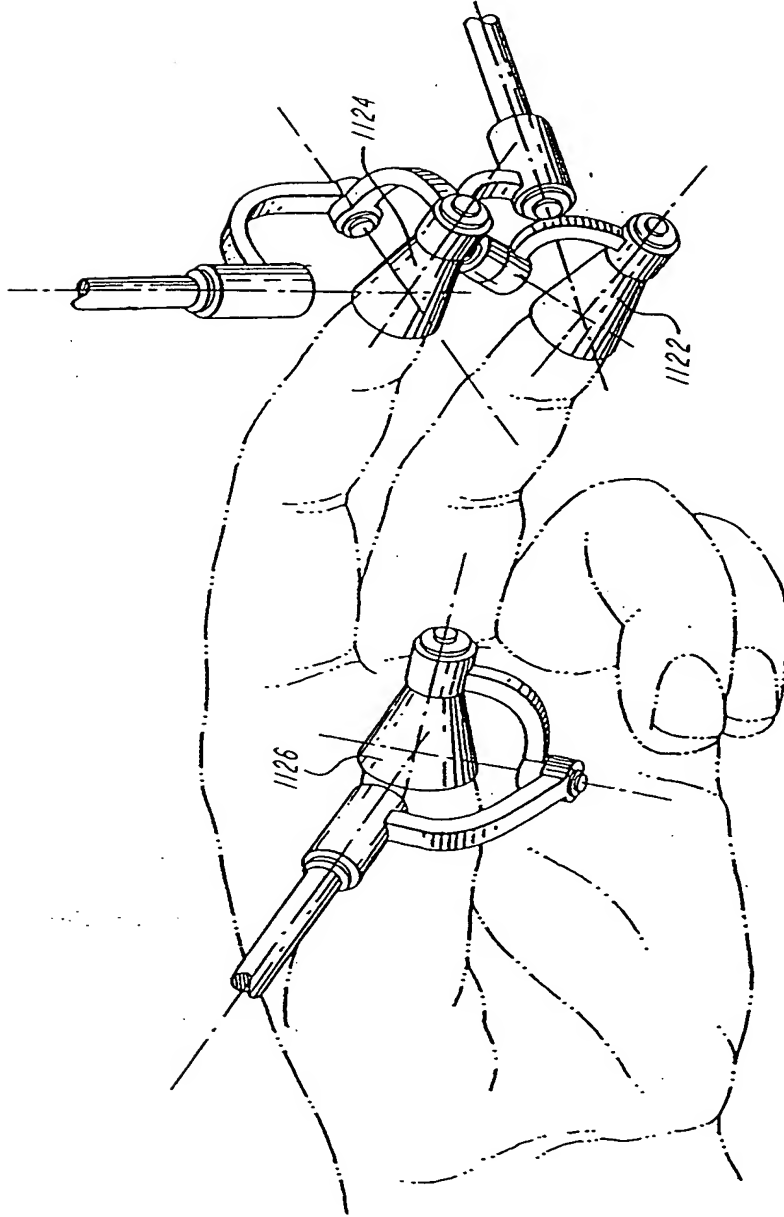


FIG. 11

100244-11601

10/10

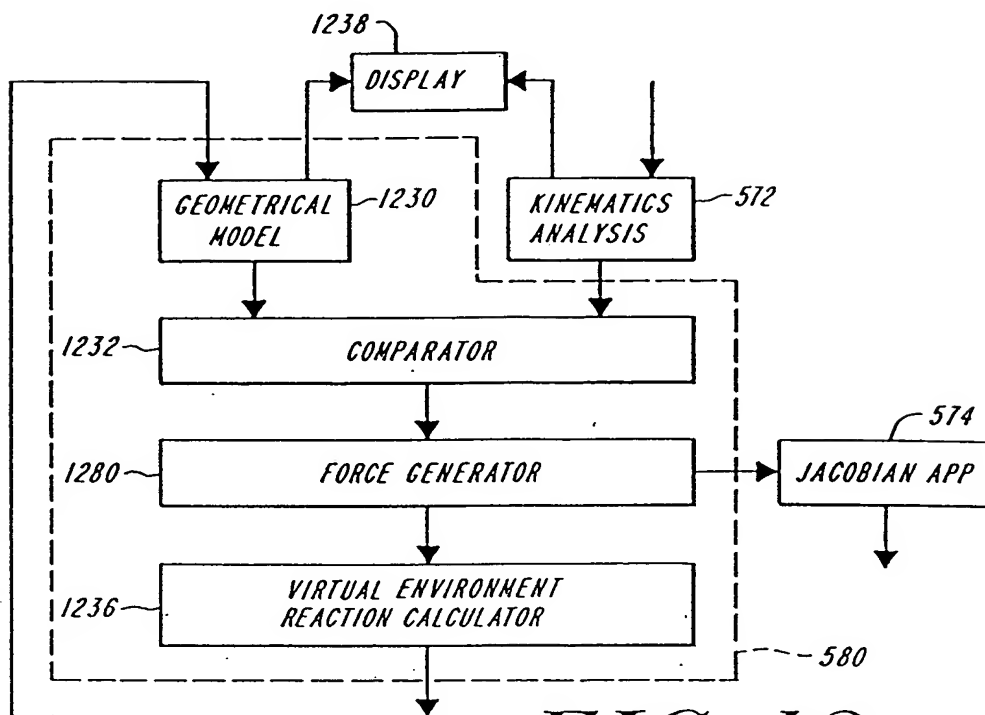


FIG. 12

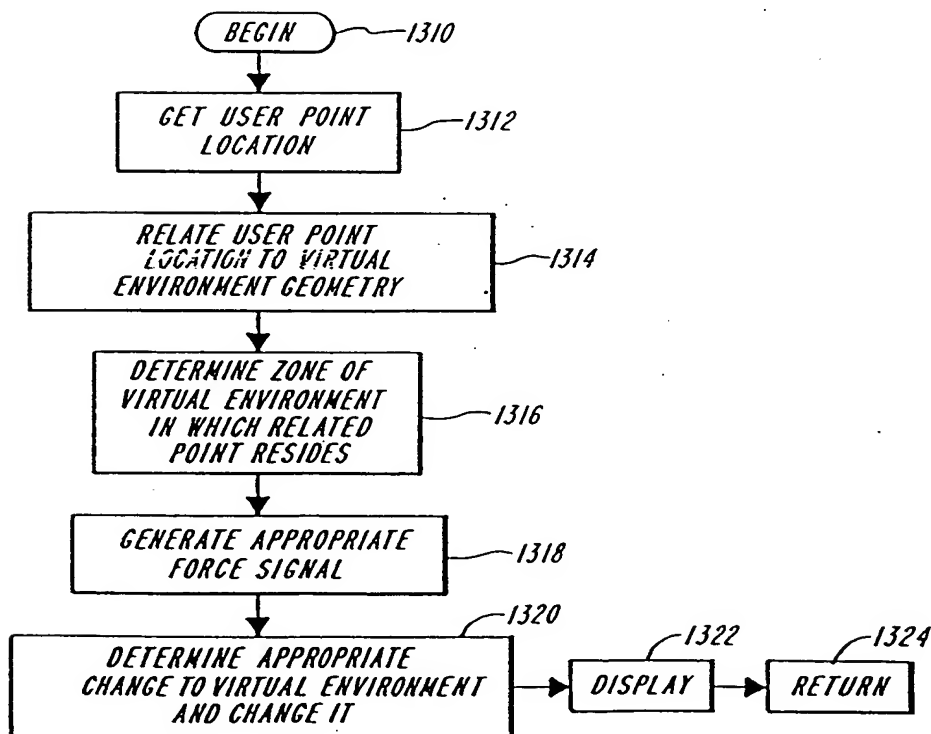


FIG. 13

1002214-11601